



Butterfly Valves (Wafer) - UL/FM

Model BVW-4

Technical Features

- Sizes available (Nominal) :** DN50/2", DN65/2-1/2", DN80/3", DN100/4", DN125/5", DN150/6", DN200/8", DN250/10" & DN300/12"
- Approvals:** UL (2" to 12") & FM (2-1/2" to 8")
- Pressure data :**
Working pressure: 21 bar (300 PSI) - UL/FM
Test pressure: Max. 42 bar (600 PSI)
- Maximum working temperature:** 120°C (250°F)
- Operation :** Gear operated
- Application:** Indoor and Outdoor

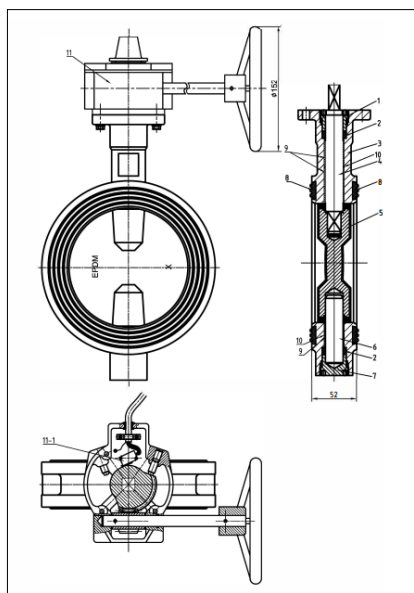


Control Valves

Carried Standard	
Design Standard	API609
Face to Face Standard	ASME B16.10
Top flange Standard	ISO 5211
Test Standard	FM 1112/UL1091

NO.	Name	Material
1	Upper Shaft Sealing Nut	WCB
2	Shaft Seal	EPDM
3	Body	DI
4	Upper Shaft	SS416
5	Disc	DI+EPDM
6	Lower Shaft	SS416
7	Lower Shaft Sealing Nut	WCB
8	End Face Seal	EPDM
9	Stem Bushing	PTFE
10	Signal Gearbox	DI

	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300
A	110	125	140	160	170	190	230	260	300
B	85	95	100	100	125	140	175	200	240
D	100	112	120	161	182	216	260	320	375
H	111	111	111	111	111	111	126	126	161
K	153	153	153	153	153	153	210	210	249
J	152	152	152	152	152	200	300	300	350
L	42	44	45	52	54	56	61	67	77

Dimensions in mm

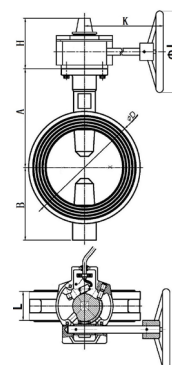

FireKing™ is a trademark of The Viking Corporation. Refer to Manufacturer's datasheet. Specifications subject to change without notice.